

DOORWAY FOAMER

Give your cross-contamination prevention program the advantage of foaming action.

FEATURES

- ▶ Turns anti-bacterial chemicals into rich, thick foam that clings to boots and wheels and penetrates cracks and crevices
- ▶ Manual override switch for easy adjustment of foam presence
- ▶ Adjustable foam and delay cycles activated by a recycle (repeating) timer for steady, reliable performance
- ▶ Dual chemical pick-ups for adding foaming agents to non-foaming sanitizing agents (e.g., PAA)

SPECIFICATIONS OPTIONS

Air

- ▶ Compressed Air (clean and dry)
- ▶ Pressure range 50-100 psi

Electrical

- ▶ 120 VAC, Single Phase, 60 Hz
- ▶ Maximum current draw is less than 1 amp

Solution Pump Fed (central system)

- ▶ Pressure range 30-100 psi
- ▶ Min. flow rate 1.5 gpm


Water Ventri Models

- ▶ Pressure range 30-100 psi
- ▶ Min. flow rate 1.5 gpm

Higher pressure or volume models available.

PRODUCT ORDERING

	Item #
Doorway Foamer	91042

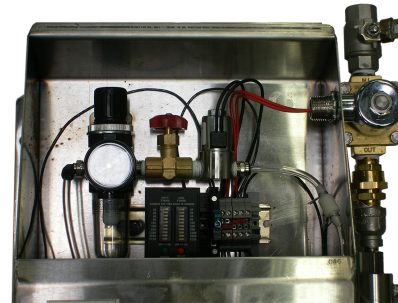

CHEMICAL INNOVATIONS
ENGINEERING

Web www.pssi.com
Phone 608-568-3841
Email websales@pssi.com
Address 3729 Peddle Hollow Rd.
Kielers, WI 53812