

DRAIN STINGER

FEATURES

- ▶ Heavy duty SS construction for sturdy, long term and frequent use
- ▶ Quickly connects to existing foamers; no need for specialized foaming equipment
- ▶ SS ¾" construction does not break down foam solution
- ▶ Large square cover plate to handle large drain openings
- ▶ Pushes the foam below the "J" trap for better coverage
- ▶ Designed to work with KC-635 HF, the only EPA approved drain biofilm disinfectant

USAGE

- ▶ Removes and controls plugging/odors from biofilm and organic drain contaminants
- ▶ Foam on drain surface for 10 minutes then air dry or rinse
- ▶ Foam must completely fill pipe and push water through the "J" trap
- ▶ For weekly use


PRODUCT ORDERING

	Item #
Drain Stinger	91015



Pathogens and biofilm can accumulate in drains, especially on drain walls above the normal fluid level.

Foam provides 360° contact along pipe walls for maximum sanitation.

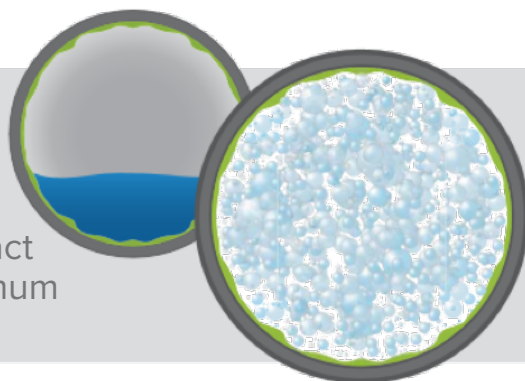

CHEMICAL INNOVATIONS
ENGINEERING

Web www.pssi.com
Phone 608-568-3841
Email websales@pssi.com
Address 3729 Peddle Hollow Rd.
Kielers, WI 53812